HydrokiT
HYDRAULIC GLOBAL SOLUTIONS





An extra eye for increased safety

Electro-hydraulic equipment
Rear-view Camera

Applications

On all machines : tractors, harvesters, excavators, loaders, tippers, long and wide vehicles, vans, campers, industrial vehicles...



NEW

+ Plus points

1. **Safety** when reversing.
2. **Visual indication** of the blind spot area.
3. Sharp, clear **display**.
4. **Night-vision** with infra red system.
5. **Large colour screen** for improved visibility: 7" or 9".
6. **Full screen view or split view (2, 3, 4),** 1 to 4 cameras connectable (according to version).
7. Camera-specific **protective cover** to work in the most extreme conditions. (Option)

www.hydrokit.com

Dimensions and general specifications




The kit includes:

- Remote control.
- Adjustable bracket.
- 1 colour camera
- 20 metre cable with waterproof connectors, supply and video cables.
- Screen
- 1 year warranty.

		E13LRECUL3LH	E13LRECUL44LH
Screen			
Screen diagonal	Inch	7"	9" dividable in 2, 3 and 4
Type of screen	-	TFT-LCD	TFT-LCD
System	-	PAL/NTSC	PAL/NTSC
Power requirement	VDC	12 / 24	12 / 24
Choice of image normal / reverse	-	Yes	Yes on 4 cameras
Camera inputs	-	2 with trigger to switch camera	4 with trigger to switch camera
Automatic change to backup view when on reverse position		-	Yes
Size	mm	183 x 125 x 37	228 x 150 x 22
Remote control	-	Yes	Yes
Resolution	-	800 x 480	800 x 480
Format	-	16:9 / 4:3	16:9 / 4:3
Camera			
Operating temperature	°C	-20 to +70°C	-20 to +70°C
Viewing Angle (Diagonal)	°	108	108
Infrared mode	-	Yes	Yes
IP rating	-	IP66	IP66
Dimension (Without protection)	mm	75 x 43 x 57	75 x 43 x 57
Current consumption	mA	290	290

Connections for 7" version

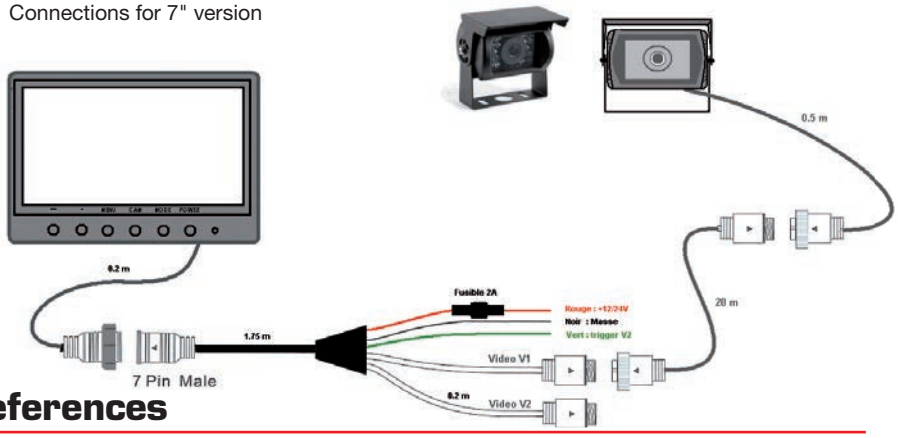



Protective cover (option)
Ref. : KC999P01V1

References

Description	Contents	References
Rear view camera kit 12/24V 7"	7" screen with 2 camera inputs, remote control, 1 colour camera, camera-display 20m connection cable with waterproof connector, adjustable bracket.	**E13LRECUL3LH**
Rear view camera kit 12/24V 9"	9" split-display-screen (up to 4) with 4 camera inputs, remote control, 1 colour camera, camera-display 20m connection cable with waterproof connector, adjustable bracket.	**E13LRECUL44LH**
Weld-on or bolt-on protective cover		**KC999P01V1**
Additional camera	Standard 108° camera	**E13ACAMSTDLH**
Additional extension cable 20 m		**E13ACABLE20MLH**



FPHCOE13LRECG40 - 07/2014 document non contractuel - © HYDROKIT

HydrokiT U.K. Ltd

HydrokiT HYDRAULIC GLOBAL SOLUTIONS

World (except UK)
Rue du Bocage - La Ribotière - 85170 le Poiré sur Vie - FRANCE
Tel. : + 33 (0)2 51 34 45 28
Fax : + 33 (0)2 51 34 12 66
E-mail : sales@hydrokit.com

UK Ireland
12+13 Yew Tree Courtyard - Earl Soham - Woodbridge - Suffolk - IP13 7SG - UK
Tel. : + 44 (0) 1728 684 800
Fax : + 44 (0) 1728 684 808
E-mail : uksales@hydrokit.com

www.hydrokit.com

A Company of Group VENSYS