


GRIFFES à poutrelles

RÉF. 6025

Crée un point d'ancrage temporaire fixe sur une poutrelle pour suspendre un appareil de levage.

Voir  schéma ci-dessous

Largeur de fer

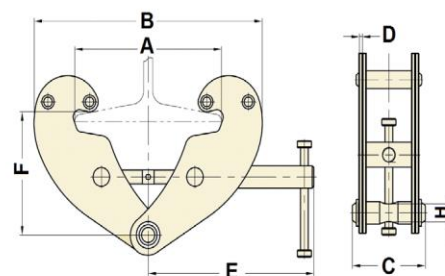


GRIFFE SIMPLE
faible
hauteur
perdue



CODE simple	A10	B20	C30	E50	H100
C.M.U. (kg)	1000	2000	3000	5000	10000
Largeur de fer (mm)	75-230	75-230	80-345	80-345	90-320
A maxi (mm)	240	240	355	355	360
B mini-maxi (mm)	192-367	192-367	243-520	243-520	272-532
C / H (mm)	94 / 20	102 / 20	132 / 22	142 / 28	180 / 38
D (mm)	4	6	8	10	12
E maxi (mm)	194	194	241	241	284
F mini-maxi (mm)	102-154	102-154	133-223	133-223	155-234
poids (kg)	4	4,8	9,8	11,6	17

CODE à manille	AM10	BM20	CM30	CM30L	EM50	EM50L	HM100
C.M.U. (kg)	1000	2000	3000	3000	5000	5000	10000
Largeur de fer (mm)	75-230	75-230	80-345	75-305	80-345	75-305	75-305
A maxi (mm)	240	240	355	320	355	310	360
B mini-maxi (mm)	192-367	192-367	243-520	232-455	243-520	242-445	272-532
C / H (mm)	94 / 20	102 / 20	132 / 22	122 / 22	142 / 28	129 / 28	180 / 38
D (mm)	4	6	8	8	10	10	12
E maxi (mm)	194	194	241	255	241	255	284
F mini-maxi (mm)	102-154	102-154	133-223	202-277	133-223	208-283	155-234
G x K (mm)	30 x 45	30 x 45	45 x 63	46 x 19	45 x 63	56 x 22	64 x 95
poids (kg)	4,2	5,1	10,4	9	12,1	12	18,8


GRIFFE À MANILLE
passage
plus large

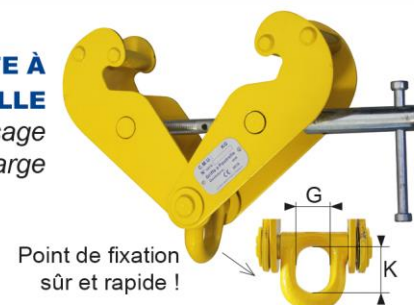

GRIFFE SIMPLE / GRIFFE À MANILLE / GRIFFE DOUBLE :



il est **INTERDIT** d'utiliser les porte-à-faux de la poutre inférieure

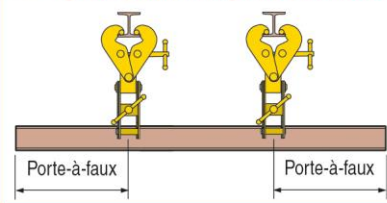

CODE double	ED50	HD100
C.M.U (kg)	5000	10000
Largeur de fer (mm)	75-305	75-305
A maxi (mm)	310	310
B maxi (mm)	455	480
C (mm)	129	146
F maxi (mm)	283	292
K (mm)	164	164
L maxi (mm)	345	352
poids (kg)	23	37

GRIFFE DOUBLE
accouplement
de 2 poutrelles

