

ANNEAU DE LEVAGE - Main de levage




RÉF. 5029 / 5030

Levage et manutention
d'éléments préfabriqués
(béton ...).

Coefficient de sécurité 1/5
Acier zingué

**RAPIDE
et EFFICACE
en toute sécurité !**

**Poignée
ergonomique
multidirectionnelle !**

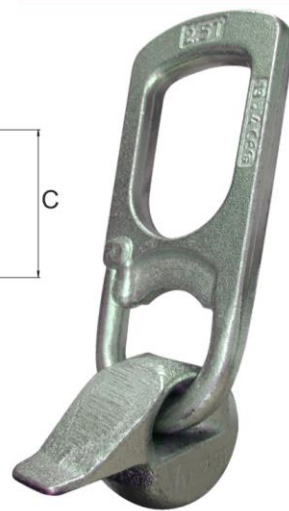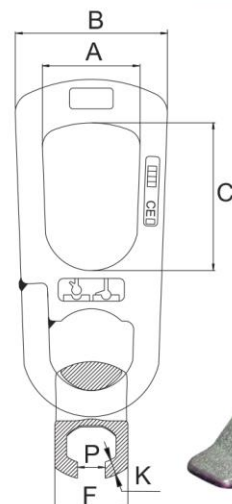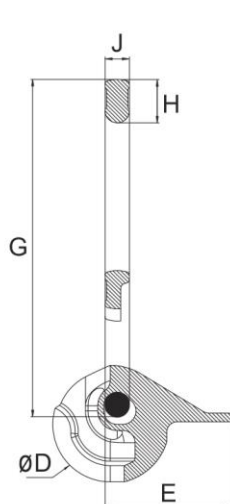

Modèle
ARTEON
réf. 5029

réf. 5029 - Modèle ARTEON

CODE	A	B	C	D	E
CMU (kg)	1300	2500	5000	10000	20000
A (mm)	44	56	68	82	113
B (mm)	74	88	118	160	191
C (mm)	70	85	88	112	135
Ø D (mm)	56	68	88	112	152
E (mm)	54	66	83	113	151
F (mm)	32	42	57	73	110
G (mm)	162	196	237	339	447
H (mm)	20	25	37	50	75
J (mm)	12	14	16	26	30
K (mm)	6,5	9	10	14	21
P (mm)	11,5	15,8	21,2	28,7	-
Poids (kg)	0,9	1,62	3,18	9,7	26,2




Coefficient de sécurité 1/4 - Acier zingué

réf. 5030 - Modèle IMPORT

CODE	A	B	C	D	E
CMU (kg)	1300	2500	5000	10000	20000
A (mm)	33	41	57	74	111
B (mm)	42	48	69	90	112
C (mm)	82	100	129	170	227
D (mm)	70	85	88	112	132
E (mm)	44	56	68	82	106
F (mm)	73	88	110	160	180
H (mm)	160	188	240	386	497
L (mm)	185	217	278	386	497
M (mm)	11	16	22	30	42
Poids (kg)	0,91	1,44	3,24	9,13	20,39

Tolérances cotes +/- 1 à 2%

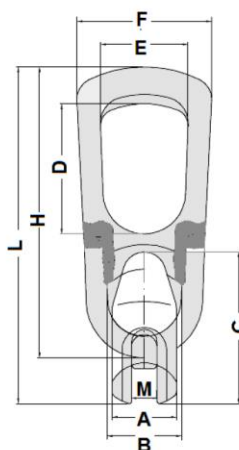

Modèle
IMPORT
réf. 5030