



Tire Tech Sheet

Tire Information

Inventory Code	5E33C3
Metric Size	150/90-12 TL
Tread Pattern	Tru Power
Ply Rating	4
Load Index / Speed Symbol	62 / A4
ECE Approval #	106R-002800



Dimensional Data

Mounted Diameter	22.75 in.	577.9 mm
Mounted Width	5.50 in.	139.7 mm
Rim Width	4.00 in.	101.6 mm
Rim Diameter	12.00 in.	304.80 mm
Tire Weight	12.90 lbs	5.9 kg
Tread Depth	20 /32"	15.9 mm

Comments or Special Conditions

Load Index 62 is equal to 265 kg / Speed Index A4 is equal to 20 km/h - without any change in pressure; Approved Rim Contours: 4JA, 5JA: Replaces 5233C3 (6-12 NHS)


Inflation and Load Data

Rated Pressure	28 psi	190.0 kPa
Rated Load	585 lbs	265 kg
Rated Speed	12.5 mph	20 km/h

Performance Data @ Rated Pressure, Load, and Speed


Rolling Circ.	68.41 in.	1738 mm
Static Load Rad.	10.26 in.	261 mm
Revolutions	926 /mi	576 /km
Deflection	1.11 in.	28.3 mm

Pressure and Load Adjustments
@ Rated Pressure

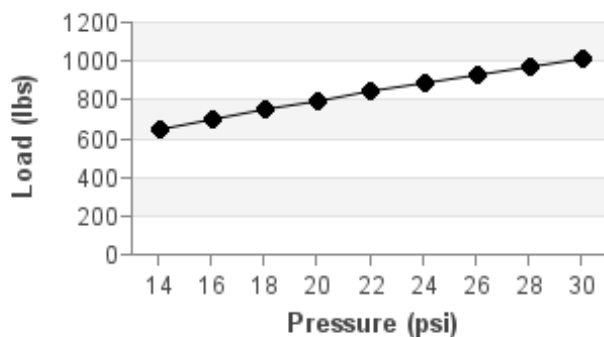

Note: Graph is for reference only.

Speed and Load Adjustments
@ Rated Pressure

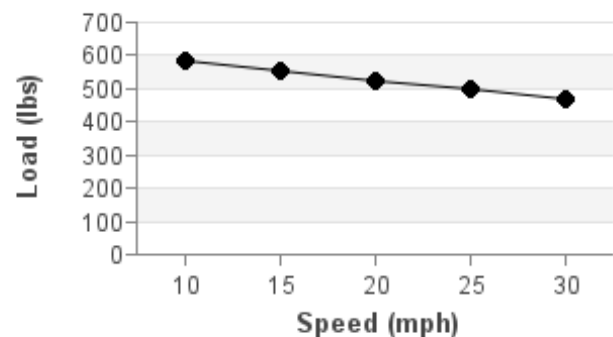

Note: If graph shows flat line at Load=0, there are no speed adjustments for this tire.

Note: Graph is for reference only.