



Tire Tech Sheet

Tire Information

Inventory Code	519067
Conventional Size	5.30/4.50-6 NHS TL
Tread Pattern	Sawtooth
Ply Rating	6
Load Index / Speed Symbol	76 / A3



Dimensional Data

Mounted Diameter	14.59 in.	370.6 mm
Mounted Width	5.34 in.	135.6 mm
Rim Width	3.50 in.	88.9 mm
Rim Diameter	6.00 in.	152.40 mm
Tire Weight	5.60 lbs	2.5 kg
Tread Depth	6 /32"	4.8 mm

Comments or Special Conditions

Non-standard tire size designation. Contact Carlisle with adjustment questions.


Inflation and Load Data

Rated Pressure	95 psi	655.0 kPa
Rated Load	880 lbs	400 kg
Rated Speed	10.0 mph	15 km/h

Performance Data @ Rated Pressure, Load, and Speed

Rolling Circ.	43.28 in.	1099 mm
Static Load Rad.	6.49 in.	165 mm
Revolutions	1464 /mi	910 /km
Deflection	0.80 in.	20.4 mm

Speed and Load Adjustments @ Rated Pressure

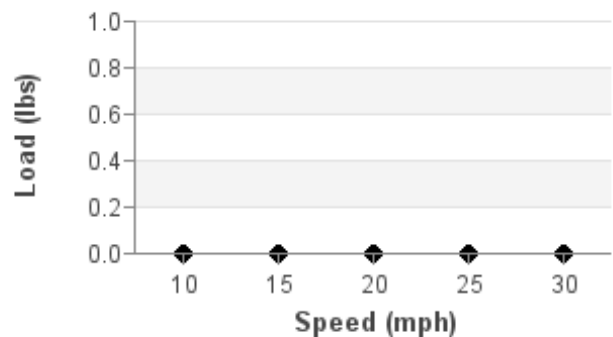

Note: If graph shows flat line at Load=0, there are no speed adjustments for this tire.

Note: Graph is for reference only.